

# TPSh-M6M144SH1W

## Recommended



Residential Roof



Utility Scale Ground Mounted



### Half Cell:

- \* Half cell design allows the module to be operated in half of the original current, lowers the internal loss and decreases the CTM loss, generating more power.
- \* Topray Solar half cell operates in lower temperature, decreases the risk of hot spot and the loss due to temperature coefficient, enhancing the performance and reliability.
- \* Module circuit separated into two sections that are connected in parallel. Combined with built-in bypass diodes, providing better performance under shading scenario.
- \* Advanced laser cutting technology ensures no damage to the cell during cutting process.
- \* Encapsulated with our own Topray Solar glass with highest effective solar transmittance from 380nm to 1100nm of 94.5% certified by National Lab, enhancing the performance and guarantees more operational hours during day to day usage.
- \* Equipped with anti-soiling film and hydrophilic coating on the front glass, Topray Solar modules are capable of self-cleaning, ensuring maximum performance and requiring minimum manual cleaning.
- \* Module certified by TUV

For SNOW ZONE III, withstand high level of wind loads(2400Pa) and snow loads(5400Pa).

For PID test. No Potential Induced Degradation caused by High Voltage Stress.

For salt mist corrosion, ammonia corrosion test.

## Qualifications and Certification



# TPSh-M6M144SH1W


## 425-450W

### Mechanical Specification

Cell Type	Mono Crystalline 166x83mm
Numbers of cells	144
Dimension	2094X1038X30mm
Weight	23.5kg
Front Glass	3.2 mm low iron tempered glass
Frame	Anodized aluminum
Junction Box	IP 67, with 3 bypass diodes
Connector	MC4 compatible
Output Cables	TUV tested,length 350mm,4.0mm <sup>2</sup>

Module Series	TPSh-M6M144SH1W					
Maximum Power at STC(Pmax) (W)	425	430	435	440	445	450
Short Circuit Current(Isc) (A)	11.23	11.31	11.39	11.46	11.53	11.60
Open Circuit Voltage(Voc) (V)	48.30	48.50	48.70	48.90	49.10	49.30
Maximum Power Current(Imp) (A)	10.50	10.57	10.64	10.71	10.77	10.85
Maximum Power Voltage(Vmp) (V)	40.28	40.69	40.89	41.09	41.32	41.48
Module Efficiency	19.55%	19.78%	20.01%	20.24%	20.47%	20.7%
Power Tolerance	0/+3%	0/+3%	0/+3%	0/+3%	0/+3%	0/+3%

### Mechanical drawings (mm)

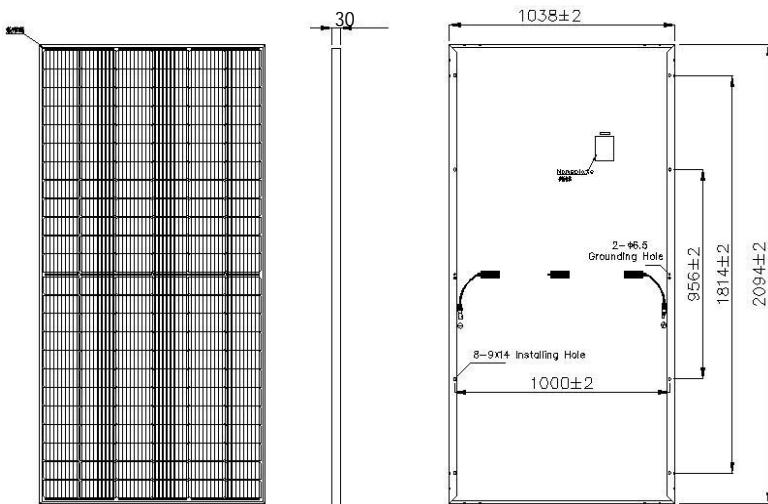

### TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature(NOCT)	44±2°C
Temperature Coefficient of Pmax( $\gamma$ )	-0.4%/K
Temperature Coefficient of Voc( $\beta$ )	-0.37%/K
Temperature Coefficient of Isc( $\alpha$ )	+0.05%/K

### PACKING CONFIGURATION

Container	20'GP	40'GP	40'HQ
Pieces per container	180	396	792

China Headquarter

Tel: 0086 755 86612689 / 86612630

Fax: 0086 755 86612620

Email: sales@topraysolar.com;franklin@topraysolar.com

Address:A-802,Future Plaza,Qiaochengbei Rd., Nanshan, Shenzhen, China

www.topraysolar.com; www.topraysolar.cn

